

# BÄRO



## ZETA Q1

Ultra compact 30 watt LED track fixture  
Perfect for fresh food and perishable displays



SUPERMARKET LIGHTING IS WHAT WE DO.  
ALL DAY.  
EVERY DAY.  
ALL OVER THE WORLD.

## BENEFITS

- Full Five Year No Fine Print Warranty
- LUXGUARD protection eliminates concerns typical with other LED luminaires. Class 2 driver provides short circuit, over current, over voltage and over temp protection.
- Optimal thermal dissipation from robust aluminum heatsink housing with clean lines
- Pivot mounts allow for rotations up to 350° and 0-90° vertically on both sides for maximum aiming adjustability
- Small profile virtually disappears



## SPECIFICATION OPTIONS

Wattage Options:  
30 watt


Fixture Finish Options:  
White, Black, Silver

Kelvin Options:  
27- 2700  
30 - 3000  
35 - 3500\*  
40- 4000

Reflector Options:  
Spot- 20°  
Flood- 30°  
Wide Flood- 40°

CRI Options:  
80  
90  
97

Dimming Available

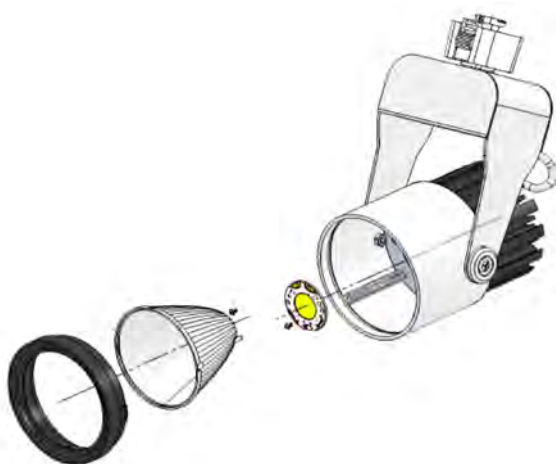





Sample Fixture : ZT1-27E50-20-H-W-WHT

Fixture	Engine	LED Array 30w		Reflector	Mounting	Dimming	Adapter Color	Finish
ZT	1	27G50- 90CRI	35E50- 80CRI	20	J- Juno 120v	D- Dimming	B	WHITE
		27H50- 97CRI	35H50- 97CRI	30	H- Halo 120v	X- None	W	BLACK
		30E50- 80CRI	35A50- 90CRI	40	G- Global 120v			SILVER
		30G50- 90CRI	40E50- 80CRI		EU1- Eutrac 120v			
		30H50- 97CRI						




Lumen Output  
 3000k array; 80 CRI;  
 30° Degree Reflector  
 2400lm

## Light Distribution Patterns of Zeta LED Reflector Options

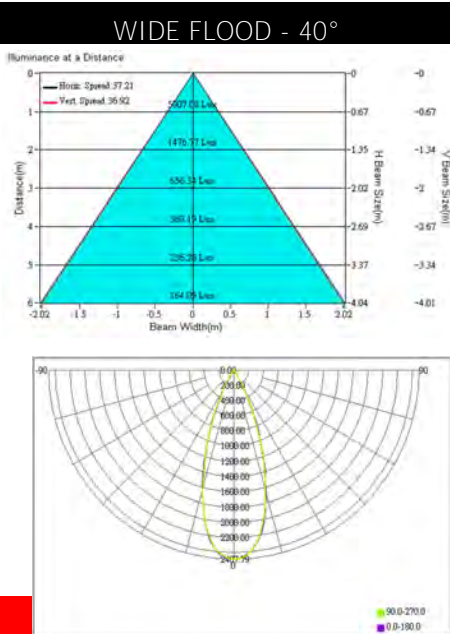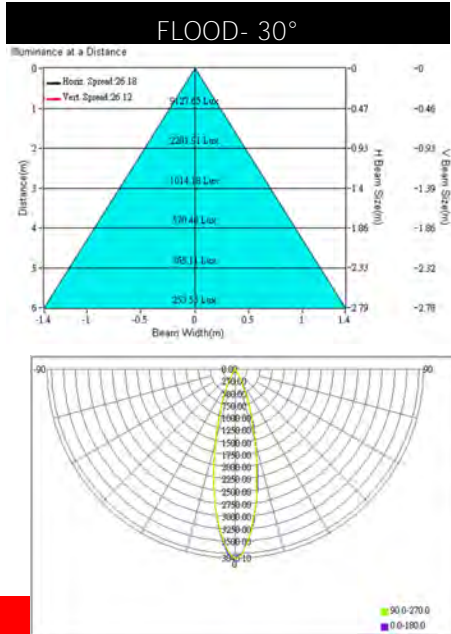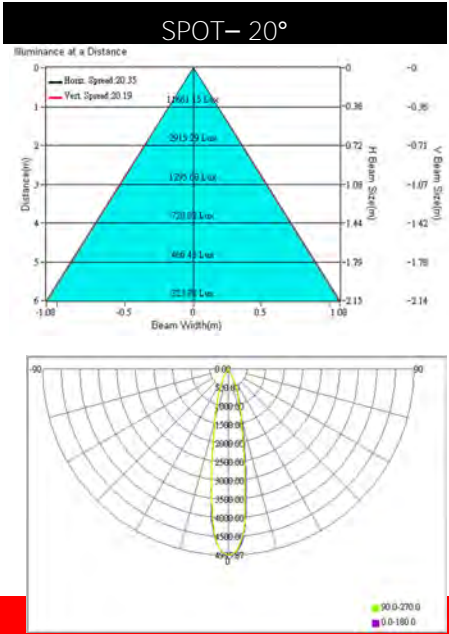

2.8 lbs (1.27 g)  
 Diameter of Head  
 3.5"  
 Length of Head  
 5.125"  
 Overall Length  
 7.85"



# THE BÄRO5

Full Five Year No Fine Print LED Warranty  
for our Zeta family

BÄRO North America, Inc. warrants all Zeta LED fixtures to the original purchaser for a period of five years.

For a period of five full calendar years starting on the day of receipt by the original customer, if any material or manufacturing defects are found, the fixture fails, or the fixture falls below L70 BÄRO will replace the fixture with an equal or better fixture.

The original fixture must be returned to BÄRO North America, Inc. and simply be found free of obvious physical damage such as dents, cracks, or breakage for warranty to apply. The original fixture and track, or support system, must **have been installed to applicable electrical codes and manufacturer's** instructions.

In addition, for a period of six months, BÄRO will provide shipping for any and all fixtures covered under warranty. However, at no time are any labor charges covered.

This warranty covers a true 5 year calendar period regardless of hour usage. No documentation will be required from customer (original purchaser) to validate hours. BÄRO North America, Inc. guarantees a virtually maintenance free lighting system for five years through the Zeta luminaire family.

**The bottom line is  
that we proudly stand behind what we make.**

LIGHT *accentuates*

LIGHT *focuses*

LIGHT *elevates*

SELLS

Your market needs a *refresh.*

THINK  
LIGHT  
BÄRO